
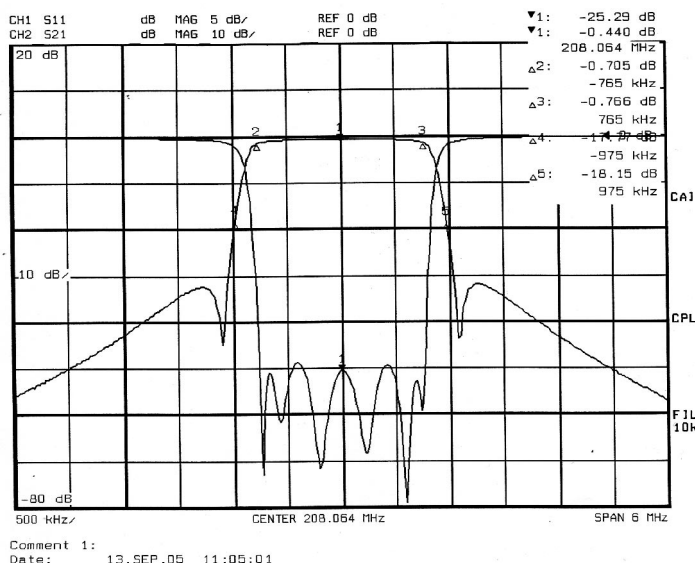


DAB BIII BAND PASS FILTER (Critical and Non-Critical Mask) 2.500Wrms

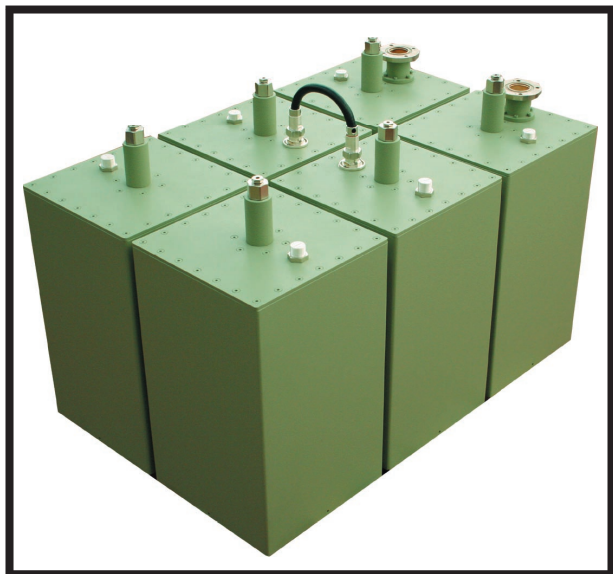

DAB FILTERS

Electrolink has expanded its radio filter products to include DAB filters. Electrolink is providing filters with up to 8 cavities to meet the strict requirements of both the critical and non-critical masks. All the filters are fully compliant with the Eureka 147 international specification achieved at DAB (174 - 240 MHz) and L Band (1452 -1492 MHz) frequencies at powers ranging from 200 W to 3 kW. All Electrolink filters are DAB band tunable and temperature compensated. The bandpass filters use light alloy and brass construction for stable high power performance.

KEY FEATURES

- Flexible and compact
- Temperature stabilised
- Tunable all over DAB BIII Band
- Light alloy and brass construction
- Square cavity at high mechanical stability
- Thermic stabilization carried out with INVAR
- Silver superficial treatments and outer painting
- Mounted in every position
- Natural convection cooling
- Fine tuning

PRODUCT	2.5KW DAB BIII Band Pass Filter
IN / OUT IMPEDANCE OHM	50
FREQUENCY RANGE MHz	170 - 240
INPUT POWERS RMS	2,5KWrms
BANDWIDTH	TUNABLE
RETURN LOSS dB	>23
INSERTION LOSS dB f(0)	<0,5dB
Attenuation f(0) ±0.77MHz	<0,7dB
Attenuation f(0) ±0.97MHz	≥15dB
Attenuation f(0) ±1.15MHz	≥40dB
Attenuation f(0) ±3.00MHz	≥55dB
TEMPERATURE RANGE °C	-10 / +50
DIMENSIONS mm	615 x 930 x 614(H)
WEIGHT Kg	80
INPUT/OUTPUT CONNECTORS	EIA 1" 5/8 (F)